

Alfa Laval S 926–S 987

Cleaning systems for lubricating, diesel and hydraulic oil applications



Introduction

Alfa Laval's S Flex separation systems combine the high efficiency, low sludge output and low operating cost of Alfa Laval centrifugal separators with a flexible scope of supply. Extensive possibilities for the separation system layout and assembly make it possible to suit any engine room and any oil separation application.

In addition, S Flex separation systems feature the EPC 70 controller, which enables the easy navigation of menus, parameters and alarms. The EPC 70 controller also has a modular construction for easy I/O board addition and replacement.

The S Flex separation concept includes the complete S separator range. Separators of different sizes can be combined into one module, including both fuel and lube cleaning, even within a single customer specified module.

Application

S separators are based on Alcap technology, which means they detect when the oil/water interphase moves into the disc stack and automatically activates the drain or discharge mechanism and thereby maintain best possible performance at all times. This makes them particularly suitable for separating fuels and oils with varying density and viscosity, though they can be used to clean all of the following:

- Lubrication oils
 - LO general
 - LO detergent type
 - LO morg oil/gear box (EP additives)
 - Lubricating fuels
- Diesel oil
- Hydraulic oil

Benefits

- *Small footprint, high flexibility* — The small separator and the modular nature of the surrounding components allow easy installation and flexible positioning in a work shop.
- *Optimum performance with Alcap technology* — A water transducer in the clean oil outlet automatically adjusts the oil/water interphase to maximize separation performance.
- *High separation efficiency* — An optimized design ensures the best possible separation efficiency from the bowl and disc stack.
- *CentriShoot* — The CentriShoot discharge system greatly reduces sludge volumes. Its fixed discharge side flexes gently to expose the discharge ports, thereby eliminating metal-to-metal wear.
- *CentriLock* — The CentriLock bowl-locking system uses a lightweight, non-threaded snap ring. This prevents wear by allowing easy removal without a sledgehammer.
- *Long service intervals*
 - Wear-preventing features like CentriShoot and CentriLock reduce the consumption of spare parts and allow planned maintenance to be performed less often. This reduces operating costs.
- *Easy operation and service* — The EPC 70 controller is designed for “one-button” starts and stops, as well as intuitive menu navigation. Information about parameters and alarms can be easily accessed, which simplifies both operation and troubleshooting. The EPC 70 also has a modular construction that enables faster troubleshooting and I/O board replacement.
- *Remote monitoring* — Using either Ethernet or Bus communication, Flex systems and modules based on S 926–S 987 can be supervised remotely from the control room. A variety of alarm functions is available as standard and extra I/O boards can be added to the EPC 70 controller in order to enhance its monitoring capabilities.

Design



1. Single Flex module with separator (excluding heater and pump)
2. Single Flex module with separator, heater and pump
3. Quadruple Flex module with separators, heaters and pumps

The S Flex separation concept provides a wide range of alternatives for S 926–S 987. Depending on the need, an S separator 926/987 can be supplied as a separator and ancillaries, as a customer-specified module, or as part of a comprehensive package including services and order specific documentation.

S 926/987 system (block components) — An S separator 926/987 with ancillaries in the form of block components provides full say of the use of space. This allows for local modularization or do-it-yourself assembly.

S 926/987 Flex modules — A compact S separator 926/987 module can be built to a customer specified configuration from a wide range of modular skids and machine blocks. Multi modules are possible, as well as mixed modules including one or several S separators and/or P separators for the simultaneous treatment of different types of mineral oils. All Flex modules are factory tested to ensure faster start-up and commissioning.


Scope of supply

Preventive maintenance procedures are handled quickly and simply with the help of a compression tool. The snap ring of the patented CentriLock bowl-locking system is non-threaded and requires only an Allen key to remove.

- Maintenance intervals:
 - Inspection Service every 4 000 h or 6 months
 - Overhaul Service every 12 000 h or 18 months

- Service spares kits contain all necessary spare parts for each service and maintenance checkpoint:
 - Inspection Kit with O-rings and seals for separator bowl
 - Overhaul Kit with parts for drive system, belt, bearings and pads. Also contains an Inspection Kit
 - Support Kit with strategic spares for operation and maintenance backup
- The System Manual includes detailed information in electronic or printed form:
 - Installation instructions
 - Operating instructions
 - Alarms and troubleshooting
 - Service and spare parts
- Commissioning and technical services including startup assistance are available from all Alfa Laval offices.
- All services can be incorporated into specifically tailored Nonstop Performance packages. Details are available from local Alfa Laval offices.

Options

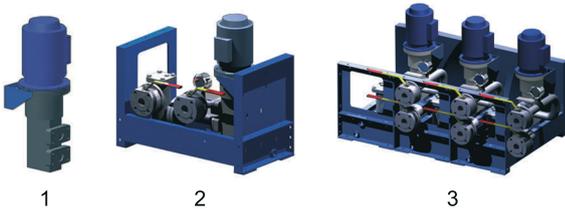


1. Pump delivered separately
2. Pump mounted on skid
3. Pump module, 3 skids mounted together

Flex separation systems based on S 926–S 987 can be complemented with the following equipment:

- Starter (included in module versions)
- Heater
- Heater control board in EPC 70 controller
- Space heating
- Additional thermometers
- Vibration sensor kit
- Feed pump
 - Supplied loose
 - Mounted on a separate skid
 - Incorporated into a module
 - As a pump module (multiple pump skids mounted together)
- Flow regulating system
- Sludge removal kit
- Sludge outlet butterfly valve kit
- Pressure indicators
- Root valves for PI
- Needle valves
- Steam shut-off valve kit
- Air pressure reducer valve
- Special cable glands, extended cables
- Tailored pipe arrangement for multiple modules, including heater cross-connection
- Emergency safety shutdown
- Remote monitoring and control
- Separator lifting tool

Working principle

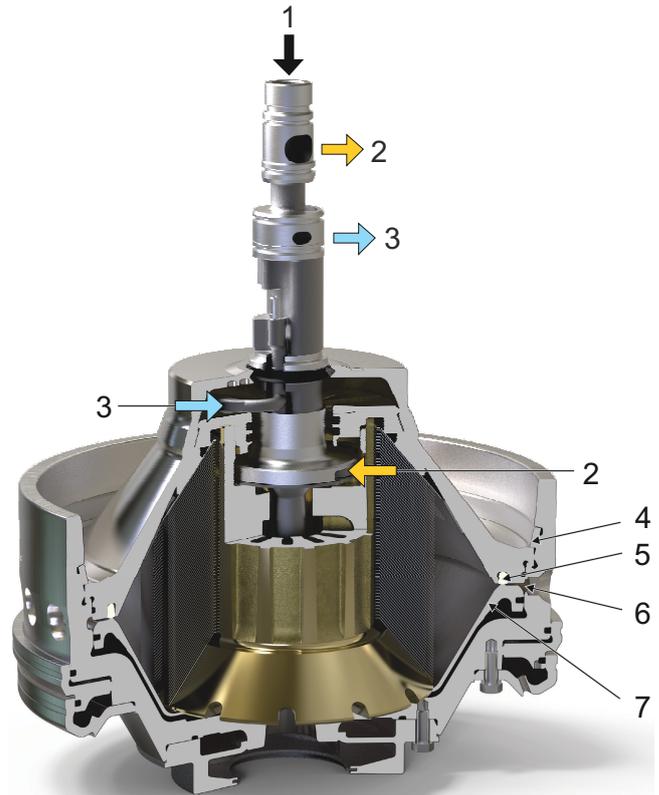

1. Untreated oil
2. Clean oil
3. Water
4. CentriLock
5. Seal ring
6. Discharge port
7. Discharge slide

A Flex separation system based on an S separator 926–987 is operated automatically by the EPC 70 controller. Untreated oil, heated to the correct temperature, is fed continuously to the separator, which is driven by an electric motor via a friction clutch and belt.

The separator bowl is fixed at the top of a spindle, which is supported by bearings and special composite springs. During operation, separated sludge and water accumulate at the bowl periphery and are intermittently discharged by the high-precision CentriShoot discharge system.


The separator's operation is based on the Alcap principle, which means the separator automatically adjusts to the nature of the oil. No gravity disc is needed. A water transducer in the clean oil outlet measures capacitance, in picoFarads, and signals changes to the EPC 70 controller.

Depending on the water content, the EPC 70 either opens the drain valve or expels the water through the bowl discharge ports during sludge discharge. A patented paring tube adapts itself to remove the water from the bowl while a paring disc pumps away the clean oil.

During normal operation, vital process parameters are monitored. These parameters, as well as alarms, are indicated


by easy-to-understand text messages on the LCD display of the EPC 70 controller.

The EPC 70 controller provides many alarm functions, including alarms for low oil pressure, high sludge tank level (if the optional sludge removal kit is included) and power failure. Additional functions are available for a vibration alarm when the optional vibration sensor is fitted.

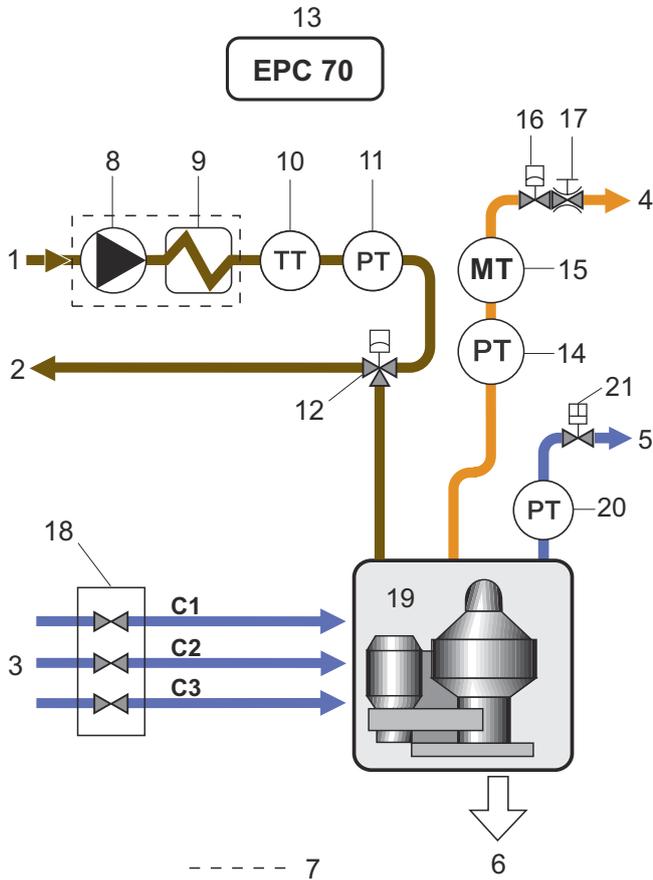

1. Untreated oil inlet
2. Oil return
3. Water inlet (C1 = Conditioning water, C2 = Opening water, C3 = Closing water)
4. Clean oil outlet
5. Water outlet
6. Sludge outlet
7. Optional
8. Feed pump
9. Heater
10. Temperature transmitter
11. Pressure transmitter, oil
12. Pneumatically controlled change-over valve
13. Control unit
14. Pressure transmitter, oil
15. Water transducer
16. Pneumatically controlled shut-off valve
17. Regulating valve
18. Solenoid valve block, water
19. Separator
20. Pressure transmitter, water
21. Drain valve


Technical data

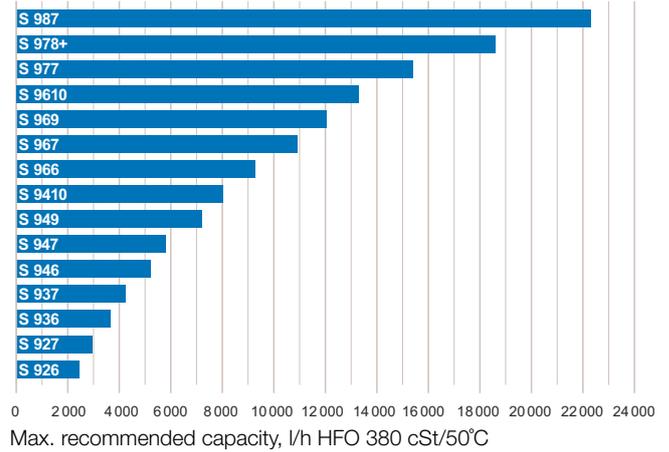

Technical data

Main supply voltage	3-phase, 220 V up to 690 V
Control voltage	1-phase, 100/110/115/230 V
Frequency	50 or 60 Hz
Control air	Min 5 bar, max 8 bar
Operating water pressure	Min 2 bar, max 8 bar

Dimensional drawing

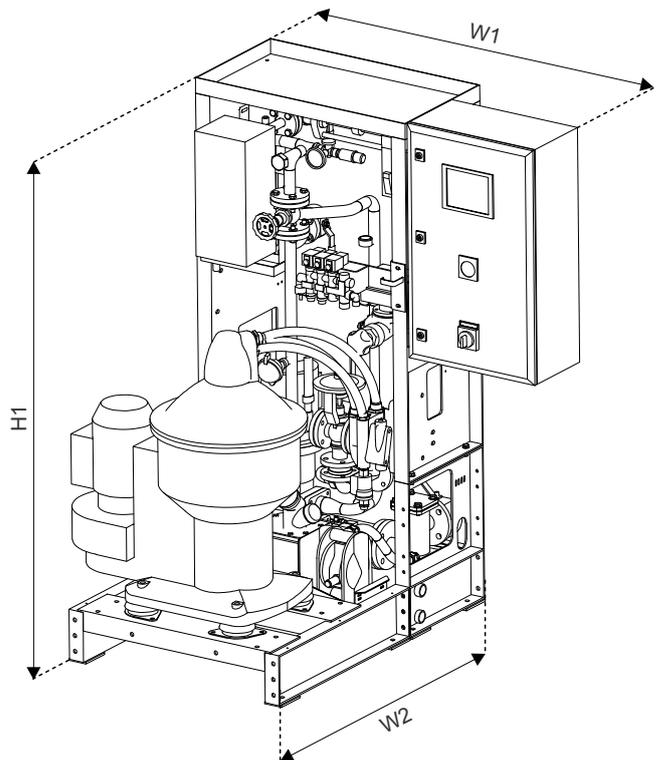

Flex module with CBM heater

Type	Size (H1 x W1 x W2)	DN	Net weight (kg) ¹
S 926/927	1650 x 1200 x 1100	25	825
S 936/937	1650 x 1300 x 1220	25	830
S 946/947/949/9410	1650 x 1300 x 1220	25	1010
S 946/947/949/9410	1900 x 1450 x 1450	40	1210
S 966/967/969/9610	1900 x 1450 x 1450	40/50	1560
S 977, S 978+	1900 x 1700 x 1650	40/50	2100
S 987	1900 x 1700 x 1650	40/50	2690

¹ Including ALP feed pump, CBM heater and SRK

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200013216-1-EN-GB

© Alfa Laval AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com